



DS2200

Ultra Compact Laser Scanner

FEATURES

- **Ultra compact dimensions**
50 x 40 x 28 mm
(1.97 x 1.57 x 1.10 in)
- **Lightweight 150 g (5.29 oz)**
- **New generation built-in real time RISC decoder**
- **Scanning speed of 500 scans/sec**
- Very high density code reading (up to 0.076 mm / 3mils)
- Dual serial interface
- Easy set up through **Winhost™**
- IP65 rugged industrial housing

APPLICATIONS

- Automatic machines
- Chemical and biomedical analyzers
- Document handling machines
- Printing verification
- Film processing machines
- Packaging machines

GENERAL DESCRIPTION

Ultra compact dimensions, high performance, versatile connectivity and programmability make the **DS2200** the ideal component for OEM and other applications where integration capability and high reliability are essential, and where cost effectiveness is a key element.

Datalogic's advanced technology and experience in miniaturized laser components have allowed the development of one of the most compact industrial laser scanner on the market, without compromising reading performance and industrial quality standards.

The **DS2200's** high scanning speed and optical quality together with the new generation real time decoder and flexible decoding software, provide high decoding performance and reliability, even of damaged or poorly printed bar codes, for the most popular bar code symbologies.

Integration into automated equipment is extremely easy thanks to the **DS2200's** miniature dimensions and its light weight. The dual serial interface increases the device's versatility and connectivity, allowing multi-point scanning configurations through Master-Slave or Multiplexer connections. User friendly set-up procedures are performed through the easy and intuitive **Winhost™** software. The **DS2200-2xxx** models also provide excellent performance on very high density codes.

DS2200 represents Datalogic's response to the high technology needs of OEMs looking for extremely compact and cost effective components to integrate into their automatic equipment. Thanks to Datalogic's recognized high quality standards, system manufacturers can be confident that the scanners installed in their machines will improve overall system performance and reliability.




MODELS AND ACCESSORIES

MODEL	DESCRIPTION	ORDER NO.
DS2200-1100	Standard resolution, linear, RS485+RS232, 5 VDC	930161000
DS2200-1110	Standard resolution, raster, RS485+RS232, 5 VDC	930161030
DS2200-2100	High resolution, linear, RS485+RS232, 5 VDC	930161040
DS2200-2110	High resolution, raster, RS485+RS232, 5 VDC	930161050
ACCESSORIES		
DC5-2200	DC converter 4-30 VDC to 5 VDC	93ACC1040



SPECIFICATIONS

POWER SUPPLY	5 VDC ±5% (4 to 30 VDC with converter)
POWER CONSUMPTION	2 W
LIGHT SOURCE	Visible laser diode (650 nm)
MAX. RESOLUTION	
1xxx models	0.15 mm (6 mils)
2xxx models	0.076 mm (3 mils)
SCANNING SPEED	500 scans/sec
MAX. READING DISTANCE	
1xxx models	220 mm (on 0.60 mm/24 mils codes)
2xxx models	125mm (on 0.20 mm/8 mils codes)
MAX. DEPTH OF FIELD	
1xxx models	170 mm (on 0.60 mm/24 mils codes)
2xxx models	85 mm (on 0.20 mm/8 mils codes)
APERTURE ANGLE	
1xxx models	52 degrees
2xxx models	62 degrees
RASTER APERTURE	15 mm (0.6 in) at 220 mm (8.7 in) for XX1X models
READABLE CODES	Code 2/5, Code 39, Code 93, Code 128, EAN/UPC, EAN128, Codabar, Pharmacode
MULTILABEL READING	Up to 6 different codes in the same presence sensor phase
COMMUNICATION INTERFACE	Dual serial interface (RS232+RS485 half duplex)
BAUD RATE	Up to 115.2 Kbauds
INPUT SIGNALS	One external trigger digital input
OUTPUT SIGNALS	Two programmable digital outputs
PROGRAMMING METHOD	Via serial port (WINHOST™)
OPERATING MODES	'Power On', 'Serial On-line', 'Automatic', 'Test', 'Verifier'
LED INDICATORS	'Power On', 'External Trigger', 'Good Read', 'TX Data'
LASER CLASSIFICATION	IEC 825 Class 2
LASER CONTROL	Security system to turn laser off in case of motor slow down or failure
DIMENSIONS	50 x 40 x 28 mm (1.97 x 1.57 x 1.10 in)
WEIGHT (without cable)	150 g (5.29 oz)
CASE MATERIAL	Die-cast zinc
OPERATING TEMPERATURE	0 to 40 °C (32 to 104 °F)
STORAGE TEMPERATURE	-20 to 70 °C (-4 to 158 °F)
HUMIDITY	90% non condensing
VIBRATION RESISTANCE	IEC 68-2-6 test FC 1.5 mm; 10 to 55 Hz; 2 hours on each axis
SHOCK RESISTANCE	IEC 68-2-27 test EA 30 G; 11 ms; 3 shocks on each axis
PROTECTION CLASS	IP65

DIMENSIONS

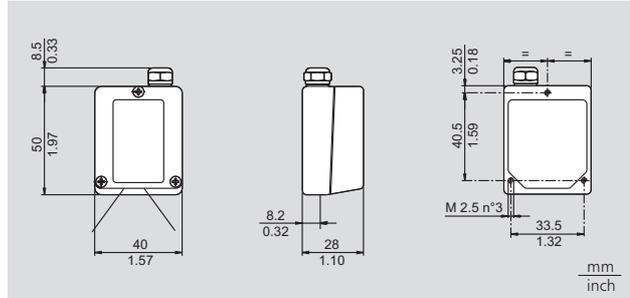

READING DIAGRAMS

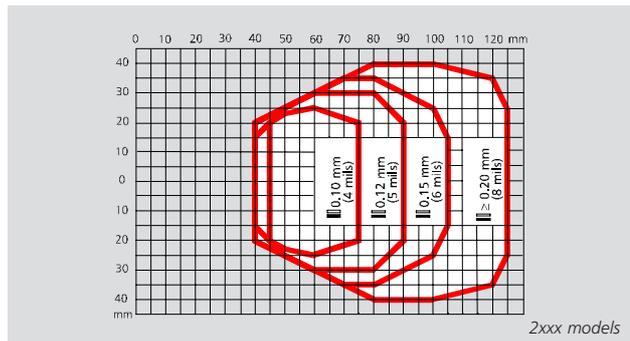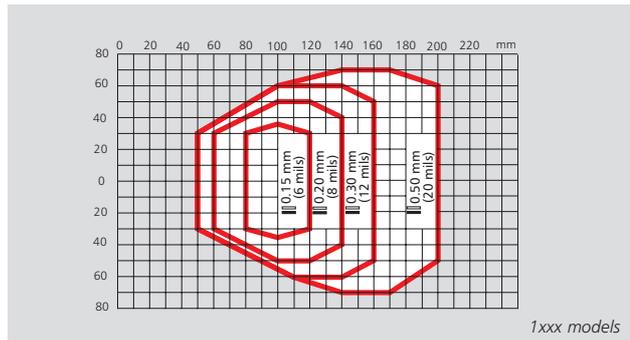

Product and company names and logos referenced may be either trademarks or registered trademarks of their respective companies.

We reserve the right to make modifications and improvements

Datalogic S.p.A.
Italy
 Corporate Headquarters
 Tel. +39 051/3147011
 Fax +39 051/726562
 info@datalogic.it

Sales Italy
 Tel. +39 051/3147300
 Fax +39 051/726562
 venditeitalia@datalogic.it

Sales International
 (Central and South America,
 Far East, Middle East - Africa)
 Tel. +39 041/5986511
 Fax +39 041/5986550
 sales-intl@datalogic.it

Australia
 Datalogic PTY LTD.
 Tel. +61 3/9559299
 Fax +61 3/9559233
 sales@datalogic.com.au

Germany
 Datalogic GmbH
 Tel. +49 7026/6080
 Fax +49 7026/5746
 info@datalogic.de

Sweden
 Datalogic AB
 Tel. +46 40/385000
 Fax +46 40/385001
 info@datalogic.se

Austria
 Datalogic Handelges MBH
 Tel. +43 2236/258820
 Fax +43 2236/258825
 office@datalogic.co.at

Japan
 Izumi Datalogic Co., Ltd.
 Tel. +81 78/3033400
 Fax +81 78/3033402
 idlmarke@izumi-datalogic.co.jp

United Kingdom
 Datalogic UK Ltd.
 Tel. +44 1582/464900
 Fax +44 1582/464999
 enquires@datalogic.demon.co.uk

Denmark
 Datalogic AB
 Tel. +45 44/209970
 Fax +45 44/209972
 info@datalogic.se

Netherlands
 Datalogic Optic Electronics BV
 Tel. +31 346/572888
 Fax +31 346/568736
 info@datalogic.nl

U.S.A.
 Datalogic Inc.
 Tel. +1 859/6897000
 Fax +1 859/3344970
 info@datalogic.com

France
 Datalogic France S.A.
 Tel. +33 1/60921111
 Fax +33 1/60921340
 dlfrance@worldnet.fr

Spain
 Datalogic España
 Tel. +34 93/4335253
 Fax +34 93/4335254
 datalogic@sei.es

Datalogic Quality Partner

